


Model: NITE[®] Plus



2390 Blackhawk Road • Rockford, IL 61125
NITE line 866-204-8570 • www.nitesystem.com

ISO 9001
Bergstrom
Climate Control Systems
NATIONALLY REGISTERED

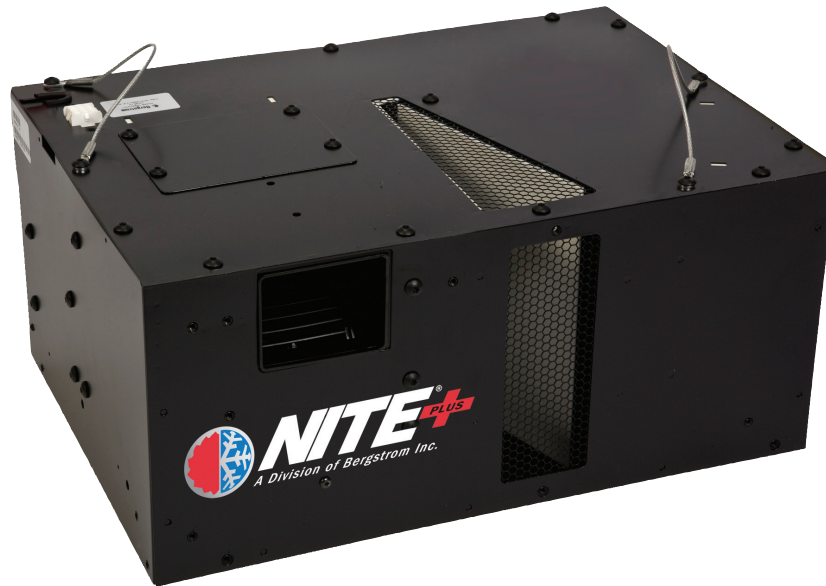

Features

- 4,600 BTU/hr cooling capacity
- Independent climate control system, starting batteries are not used
- CARB approved (# 08-643-004)
- Unit run time 8-10 hours*
- Installs easily under bunk in 8-10 hours
- Virtually maintenance free
- Quiet operation
- Shore Power option
- Hotel load option
- Hybrid power system available for extended run time

Sound Data Reference

Source of Noise	Sound Level dBA
Jet plane @ 50 ft. distance	130
Chain saw	108
Heavy city traffic	100
Motorcycle @ 30 ft. distance	88
Automobile @ 25 ft. distance	80
Automobile interior @ 50 mph	70
Kohler DC Power Unit 1.4BEOR	68
Normal conversation	60
NITE Plus Unit	50
Soft whisper	35

* Dependent on ambient temperature, solar load and truck insulation

Construction


- Shell constructed with steel for maximum durability
- OEM approved construction
- Hermetically sealed electrified unit
- 134A refrigerant sealed loop

Warranty

- 1 year limited warranty parts and labor
- 2 year limited warranty parts only



NITE Plus AC UNIT

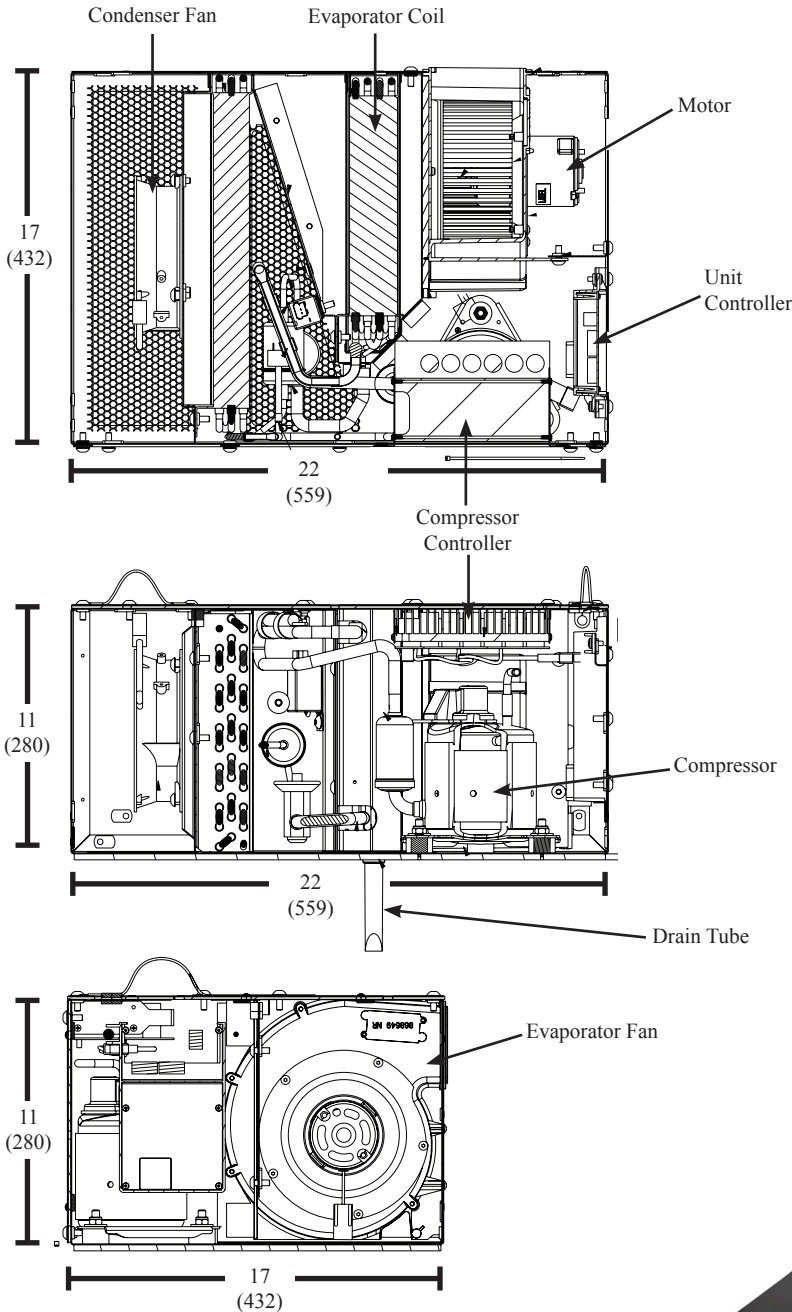

Weights and Dimensions

Overall system weight: 464 lbs.*

NITE Plus AC unit		
Weight	70 lbs	31.8 kg
Length	22 in	559 mm
Depth	17 in	432 mm
Height	11 in	280 mm

NITE Plus Espar Heater		
Weight	6 lbs	2.7 kg
Length	12.2 in	310 mm
Depth	4.5 in	114 mm
Height	4.8 in	122 mm

Battery boxes with straps (ea)**		
Weight	44 lbs	20.0 kg
Length	14.5 in	368 mm
Depth	20 in	508 mm
Height	12 in	305 mm

Battery (ea)**		
Weight	75 lbs	34.0 kg
Length	12.93 in	328 mm
Depth	6.75 in	172 mm
Height	9.34 in	237 mm

* Weight of entire system may vary dependent on installation kits used

** Weight reflects Bergstrom supplied batteries (4 required) and battery boxes (2 required)



Distributed by